

Description

D28CxxM30JP DC/DC converter has input voltage range 16V ~ 40V, output power of 30W, with operating temperature range of -55°C ~ +105°C. It adopts PCB surface mount technology and is encapsulated with metal case with potting. The product weighs about 24g, with input and output isolated. It is applied in DC power supply systems to realize the isolated voltage conversion function. The module has the following characteristics:

Product Features

1. Enable control function
2. Fixed switching frequency
3. Input undervoltage protection
4. Withstands 50V surge voltage
5. Output short-circuit protection
6. Output over-current protection
7. Package: 1" × 1"
8. Complies with GJB 10164-2021 "General Specification for Microcircuit Modules"



3 years
Warranty

1.Selection Guide

Product Model	Output Power (W)	Nominal Output voltage/Current	Efficiency (@28VDC, %/Typ.)	Max. Capacitive Load (μF)
D28C05M30JP	30	5V/6.00A	90	1500
D28C12M30JP	30	12V/2.50A	91	1000
D28C15M30JP	30	15V/2.00A	91	1000
D28C24M30JP	30	24V/1.25A	91	820
D28C28M30JP	30	28V/1.08A	90	680

2.Environmental Specifications

Item	Min.	Typ.	Max.	Unit	Remarks
Operating temperature	-55	25	105	°C	Baseplate temperature
Storage temperature	-55	25	125	°C	
Relative humidity	-	-	95	%	non-condensing
Pin Soldering Resistance Temperature	-	-	300	°C	Soldering time shall not exceed 10 seconds

3.Electrical Specifications

Input Specifications		Condition	Minimum	Typical	Maximum	Unit
Input voltage range		I _{out} =0~100%I _o	16	28	40	V
Surge Voltage		50ms	-0.5	-	50	
Input under-voltage protection	Starting voltage	I _{out} =0~100%I _o	-	-	16.0	
	Turn-off voltage		13.0	-	-	
Enable control voltage* (positive logic)	Starting voltage	Ctrl to high or floating	3.5	-	12.0	
	Turn-off voltage	Ctrl to low or ground	0	-	0.7	
No-load power consumption		V _{in} =16V~40V no-load	-	-	1.5	W
Temperature coefficient		Full load	-	-	0.02	%°C

Output Specifications		Condition		Minimum	Typical	Maximum	Unit
Output voltage		Vin=16V~40V full load	5V	-	-	±2	%Vo
			12V、15V、24V、28V			±1	
Output current		Vin=16V~40V		Refer to Selection Guide			A
Linear Regulation		Vin=16V~40V full load		-	-	±0.5	%
Current regulation		Vin=28V no-load→full load		-	-	±0.5	%
Ripple & Noise		Vin=16V~40V,0~100%Io, BW=20MHz	5V	-	-	100	mV
			12V、15V			120	
			24V、28V			150	
Over-voltage Protection ^{bc}		Vin=16V~40V full load		110	-	150	%Vo
Over-current Protection		Hiccup mode		110	-	180	%Io
Over-temperature protection		Housing operating temperature		-	125	-	%℃
Efficiency		Vin=28V full load		Refer to Selection Guide			%
Trim		Guaranteed when output is down Iout≤100%Io Guaranteed when output is up Po≤50W		90	-	110	%Vo
Load dynamic response	overshoot/undershoot	Iout:25%load→50%load→25%load Iout:50%load→75%load→50%load di/dt=0.1A/us		-	-	±5	%Vo
	Recovery time ^d			-	-	500	μ s
Start delay time ^e		Vin=0V→28V full load Time from power-on to the output voltage rising to 10%		-	-	20	ms
Output rise time		Vout rises from 10% to 90% full load		-	-	20	ms
Starting overshoot		Vin=16V~40V full load		-	-	3	%
Capacitive load ^f		Purely resistive load test,low ESR capacitor,full load		Refer to Selection Guide			μ F
Short circuit protection		Hiccup mode		Automatic recovery after fault removal			
a) When the Ctrl pin is connected to a high level (3.5V ~ 12V) or left floating, the product operates normally. When it is connected to a low level (0V ~ 0.7V), the product has no output. b) The overvoltage protection mode is clamping mode. After the overvoltage protection is released, the output voltage test result meets the electrical characteristic requirements. c) The parameters are guaranteed by the design and are only tested during identification and design or process changes. d) Recovery time refers to the time from the beginning of the transition until the output voltage returns to the corresponding stable value the accuracy range. e) The start-up delay time can be calculated either from the power supply's transition or from the time when the ctrl terminal is connected to a low level, until the output voltage rises to 10% Vout. f) Capacitive loads do not affect the DC parameters. Note: The above specification parameter test circuit refers to the typical application 4.2 and 4.3.							

General Specifications		Condition	Minimum	Typical	Maximum	Unit
Insulation resistance ^g		Add 500VDC between input and output, between input and shell, between output and shell for 10s	100	-	-	MΩ
Switching frequency		Full load	220	260	300	kHz
Isolation voltage ^{gh}	Input-Output	t=1min set the leakage current to 1mA	1500	-	-	VDC
	Input-Housing		1500	-	-	
	Output-Housing		500	-	-	
g) The input leads are pins 1, 2 and 3, and the output leads are pins 4, 5, 6. During the test, the input leads need to be shorted together, and the output leads need to be shorted together; h) Judgment criteria: the module shall be free of breakdown and arcing.						

Physical characteristics	
Dimension	25.40*25.40*11.70mm

Weight	24g±5g (Type)
Cooling Method	Conduction Heat Dissipation

4. Typical Applications

4.1 Enable Control

The function of the positive and negative enable logic is as follows:

For positive logic enable, the module works normally when the control pin is connected to high level or floating, and is turned off when grounded or low level. For negative logic enable, the module works normally when the control pin is grounded or at low level, and is turned off when connected to high level or floating;

The enable pin of this model is positive logic. When the enable pin is left floating (or connected to high level), the product has output. When not in use, the enable pin can be left floating; when using the enable pin, the product has no output when the enable pin is connected to the input ground (or connected to low level) by means of a switch, etc.

Switching mode	Triode control mode	Optocoupler isolation control mode	Logic gate control mode

4.2 Application Diagram

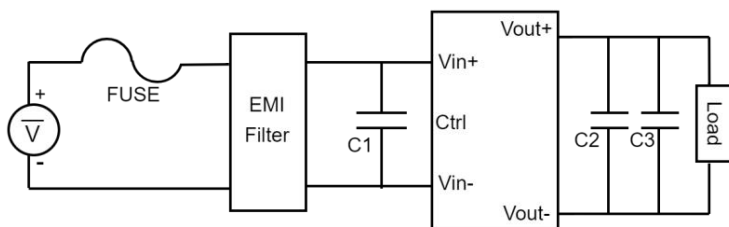


Fig.1 Application

Fig. 1 shows the typical application connection method of the module. The input terminals of the module power supply will have significant differences due to the length of the input source leads. In order to prevent input oscillation caused by excessively long input lines, it is recommended to add input capacitors near the input pins of the module. Similarly, an output capacitor should be added at the output end of the module:

Recommend parameters						
C1	Input capacitance: 100μF ceramic capacitor or electrolytic capacitor					
C2	Output capacitance: The capacitance values in the table below are for ceramic capacitors.					
	Output voltage (V)	5	12	15	24	28
	Value selection for C2 (μ F)	100	68	68	47	47
C3	Output capacitance: 1μF ceramic capacitor					
The above parameters can be adjusted according to the actual system application requirements, select the appropriate parameter values.						

4.3 Output Ripple Voltage Test Diagram

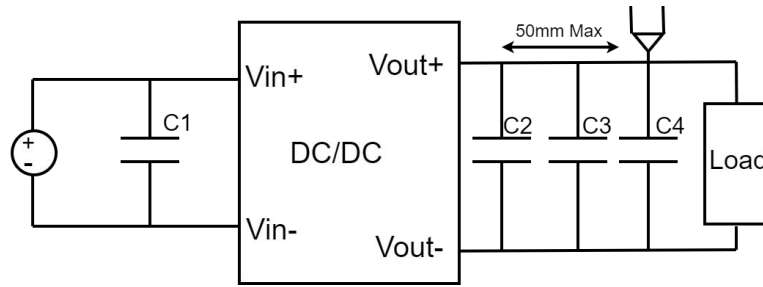


Fig.2: Schematic diagram of output ripple voltage

Ripple measurement is generally measured under the condition of rated input and output, the oscilloscope bandwidth is set to 20MHz, and the oscilloscope probe with the ground clamp removed is used to measure at a distance of about 3~5cm from the output end.

Note: The oscilloscope uses a bandwidth of 20MHz.

Recommend parameters

C1	Requires mounting close to the input pins of the module, recommend 100 μF ceramic capacitor or solid-state capacitor					
C2	Ceramic capacitors with the capacitance values listed in the table below, which are required to be installed close to the output pins of the module to better reduce the output ripple voltage and improve the output characteristics of the product in high and low temperature environments.					
	Output voltage (V)	5	12	15	24	28
	Value selection for C2 (μF)	100	68	68	47	47
C3	1μF ceramic capacitor					
C4	10μF tantalum capacitor or ceramic capacitor					

4.4 Trim Function Application Note

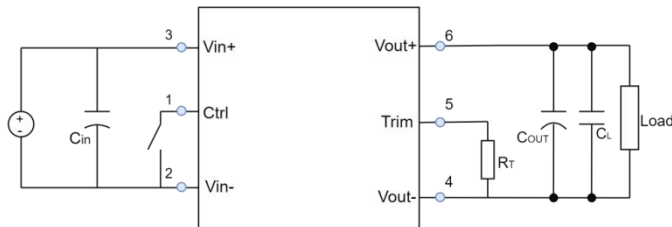


Fig 3: Functional application diagram of Trim

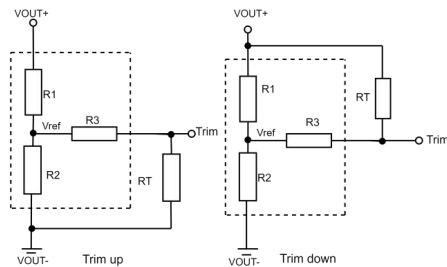


Fig.4 Trim circuit (dashed box is inside the product)

Trim resistance calculation formula:

$$\text{up: } R_1 = \frac{aR_2}{R_2 - a} - R_3$$

$$a = \frac{V_{\text{ref}}}{V_{\text{O}'} - V_{\text{ref}}} \cdot R_1$$

$$\text{down: } R_1 = \frac{aR_1}{R_1 - a} - R_3$$

$$a = \frac{V_{\text{O}'} - V_{\text{ref}}}{V_{\text{ref}}} \cdot R_2$$

RT is Trim resistance

a is a custom parameter and has no actual meaning.

Model	R1(kΩ)	R2(kΩ)	R3(kΩ)	Vref(V)
D28C05M50JP	7.48	2.49	4.3	1.25
D28C12M50JP	9.49	2.49	4.3	2.5
D28C15M50JP	12.49	2.49	4.3	2.5
D28C24M50JP	21.5	2.49	4.3	2.5
D28C24M50JP	25.5	2.49	4.3	2.5

5.Product Characteristic Curve

Efficiency vs Input Voltage (Full Load)

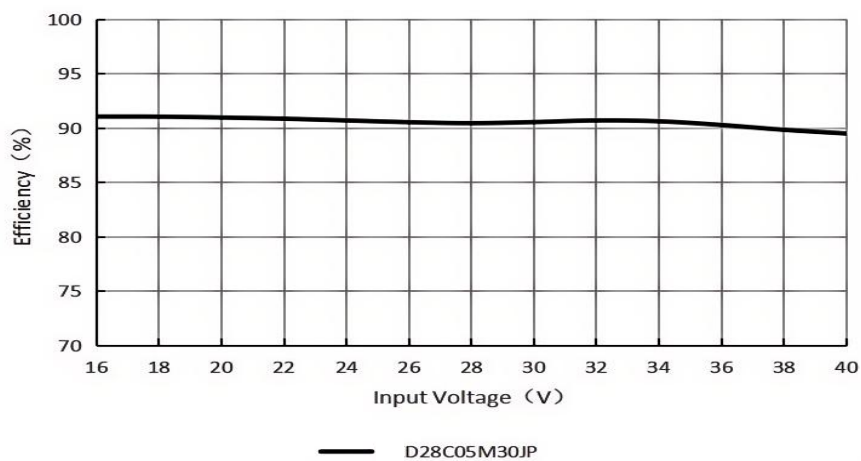


Fig.5

Efficiency Vs Output Load (Vin = 28V)

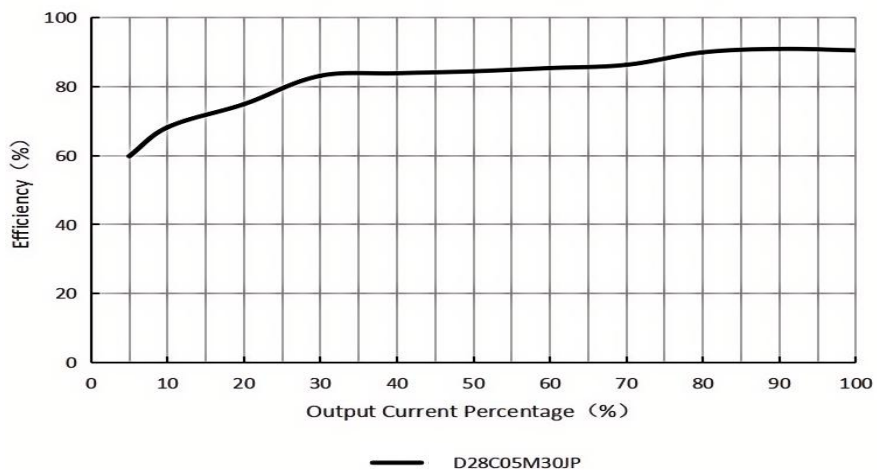


Fig.6

Efficiency vs Input Voltage (Full Load)

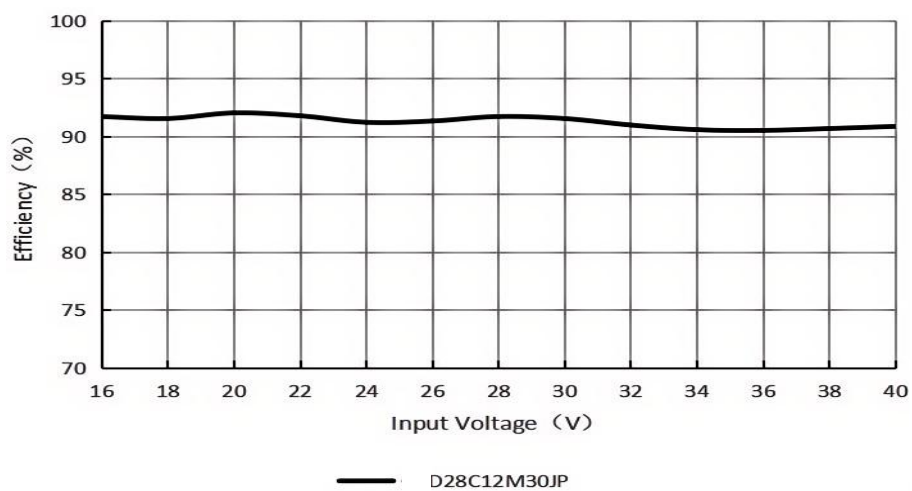


Fig.7

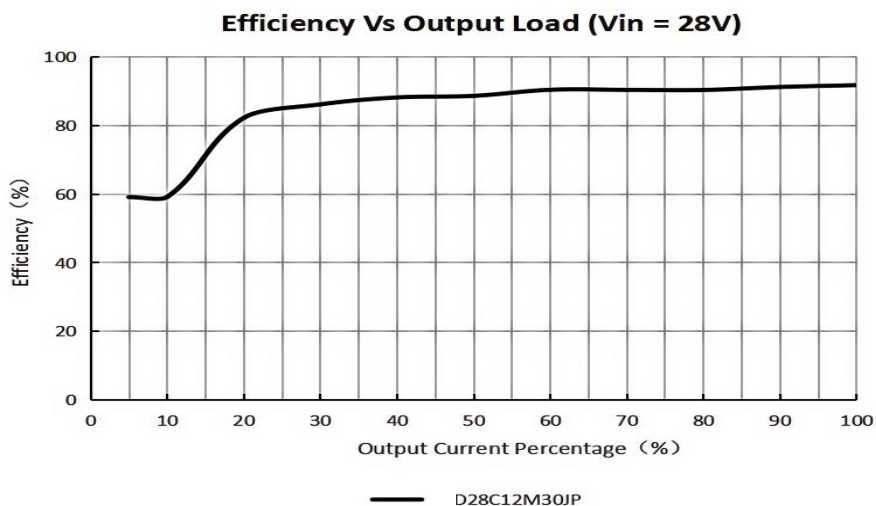


Fig.8

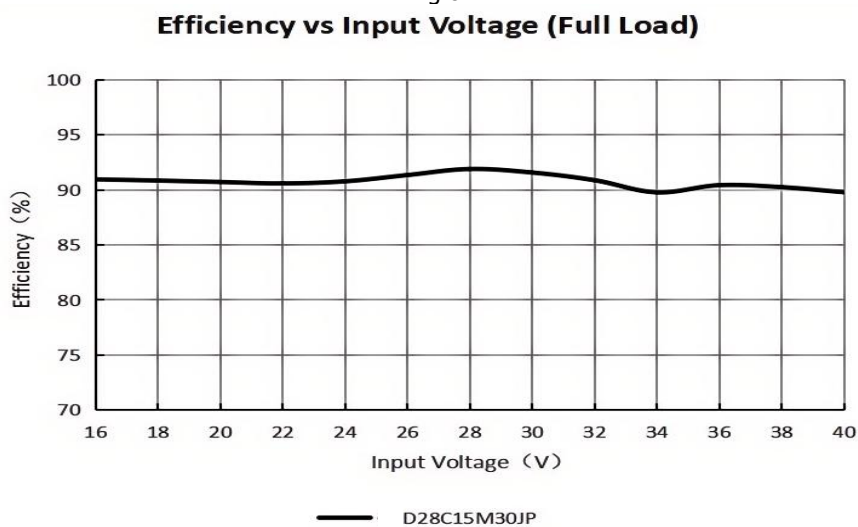


Fig.9

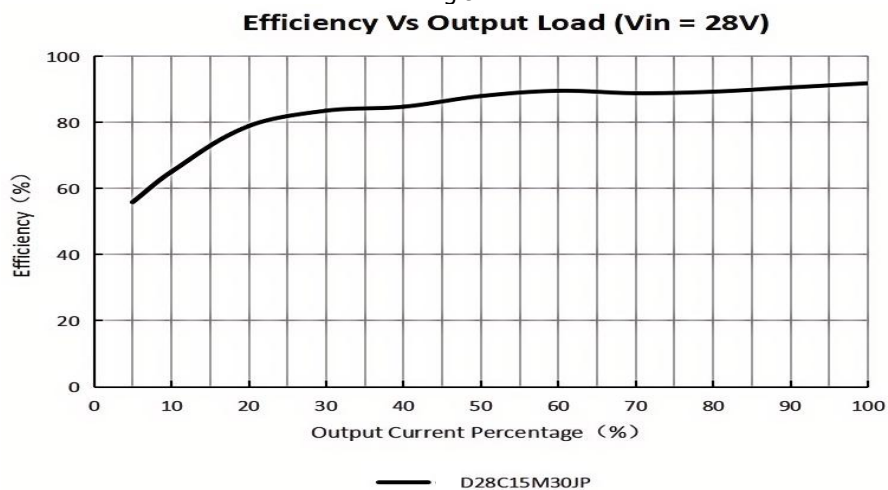


Fig.10

Efficiency vs Input Voltage (Full Load)

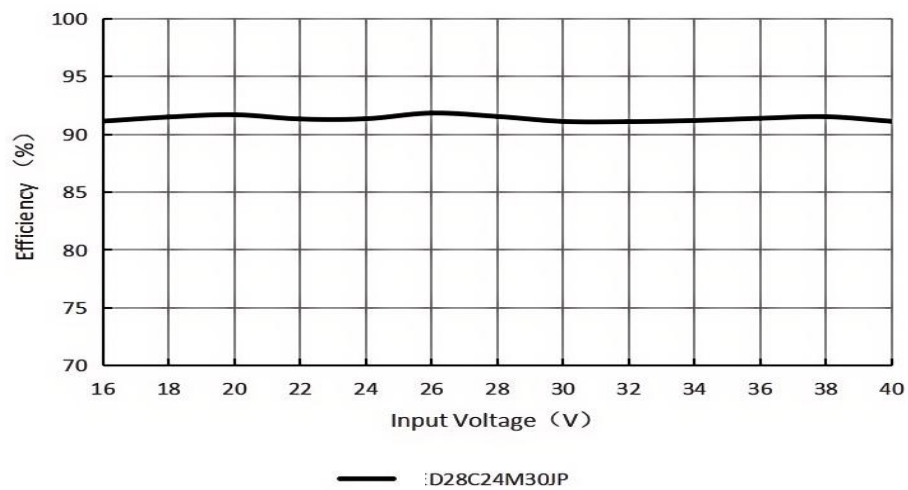


Fig.11

Efficiency Vs Output Load (Vin = 28V)

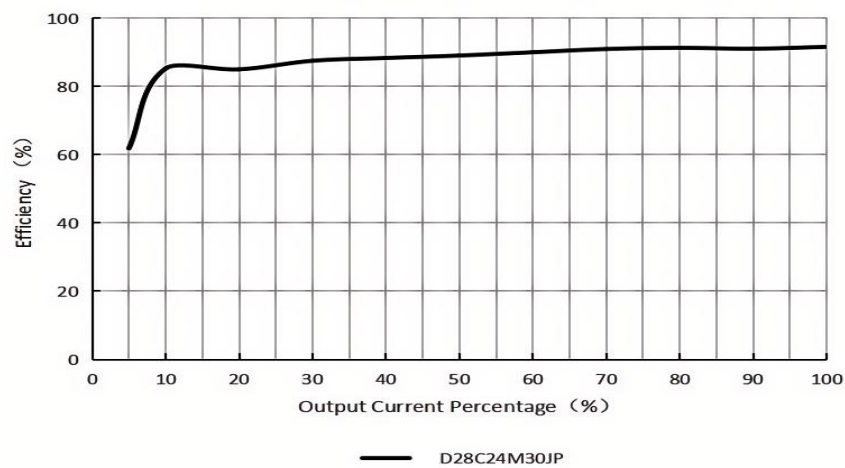


Fig.12

Temperature Derating Curve Chart

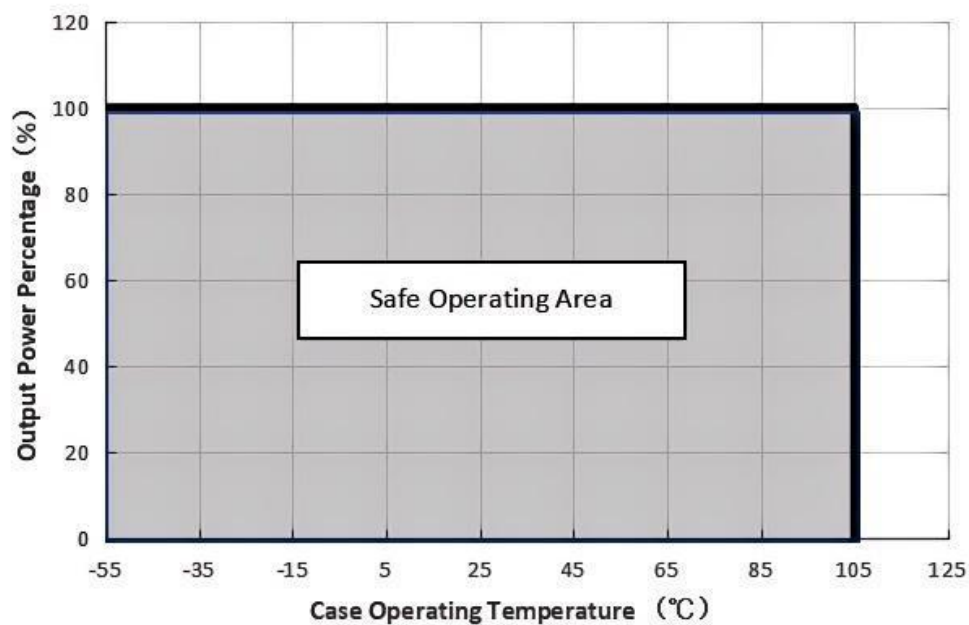


Fig.13

6. Dimension and Terminal Definition

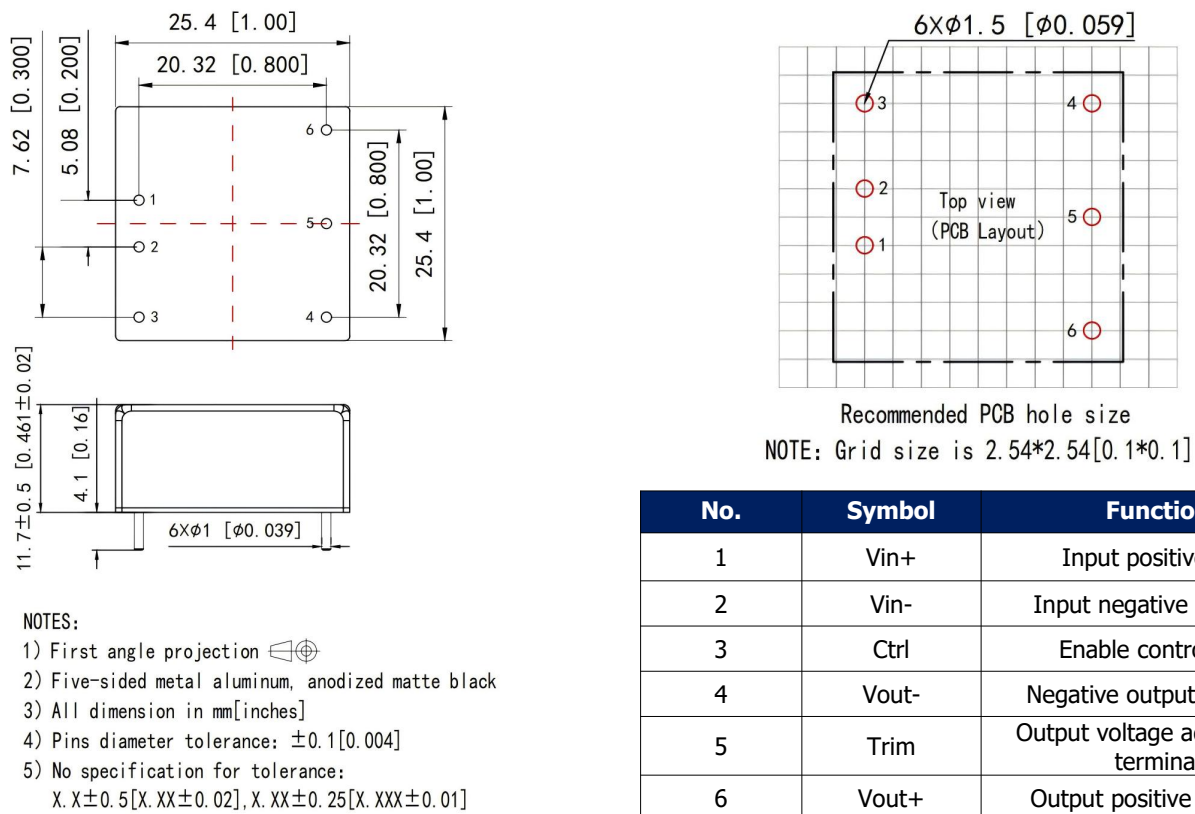


Fig.14 Terminal Arrangement (Top View, Pin Up) and Appearance Dimension

7. Precautions

- 7.1. Do not reverse the polarity of the power supply. Pay attention to the input voltage range, which is 16V ~ 40V;
- 7.2. Please use wide PCB leads or thick wires between the power module and the load, and keep the line voltage drop below 2% V_o to ensure that the output voltage of the power module remains within the specified range;
- 7.3. The measurement of voltage must be conducted at the root of the module terminals, eliminating the measurement errors caused by the test tooling fixtures.
- 7.4. The impedance of the lead may cause output voltage oscillation or large ripple. Please make sufficient evaluation before use;
- 7.5. Prevent product collision;
- 7.6. Pay attention to the "1" pin (or ESD) identification, according to the correct installation direction plate welding;
- 7.7. Heat sink or other heat dissipation measures should be installed to ensure that the shell temperature is lower than the maximum operating temperature specified by the product. The operating temperature range of the product is: $-55\text{ }^{\circ}\text{C} \leq T_C \leq 105\text{ }^{\circ}\text{C}$;
- 7.8. Lead welding temperature is less than 300 $^{\circ}\text{C}$, welding time should not exceed 10 seconds;
- 7.9 The heat dissipation surface of the product: either fasten it with screws, or apply thermal paste on the contact surface for heat dissipation; in addition, glue should be applied around the perimeter for fixation.

Note:

1. Our products shall be classified and stored according to ISO14001 and relevant environmental laws and regulations after being scrapped, and shall be handled by qualified units;
2. Except for special instructions, all indicators in this manual are measured when $T_a = 25\text{ }^{\circ}\text{C}$, humidity <75%, nominal input voltage 28V and output rated load;
3. The test methods of all indicators in this manual are based on the company's enterprise standards;
4. Our company can provide customized products, specific needs can directly contact our technical personnel;
5. If the product involves multi-brand materials, please refer to the manufacturer's standards for differences such as different colors.

DONGGUAN AMCHARD-POWER TECHNOLOGY CO., LTD.

www.amchard-power.com

Mail:info@amchard-power.com