

Features

- Wide input range (85-264VAC,100-370VDC)
- 54.5*29.2*23.6mm compact size
- No-load power consumption<0.16W
- Protection type: short circuit/over load/over voltage
- Operating temperature range -40°C to +85°C
- 4000V isolation voltage
- Medical Level Safety Certification (Level 2 MOPP Patient Protection)
- 100% high temperature aging and testing
- 3 years warranty



3 years
Warranty

Selection Guide



Model	Input Voltage	Rated Power (W)	Output Voltage (V)	Output Current (A)	Ripple & Noise (mVp-p)	Efficiency (%)
QH30-20B09MU	85-264VAC 100-370VDC	30	9	3.34	50	84
QH30-20B12MU		30	12	2.5	50	87
QH30-20B15MU		30	15	2	50	88
QH30-20B24MU		30	24	1.25	50	86.4

Specifications



OUTPUT	Voltage Tolerance	±2.0%				
	Line Regulation	±1.0%				
	Load Regulation	±1.0%				
	Setup, Rise Time (Typ.)	1000ms, 50ms/230VAC 2000ms, 60ms/115VAC at full load				
	Hold Up Time (Typ.)	40ms/230VAC 10ms/115VAC at full load				
	Ripple & Noise (Max.) (Note 2.)	100mV				
INPUT	Voltage Range	85-264VAC 100-370VDC				
	Frequency Range	47-440Hz				
	Current (Typ.)	750mA/115VAC 300mA/230VAC				
	Inrush Current (Typ.)	Cold boot 40A/230VAC				
	External Fuse Recommended	2A/250V				
	Leakage Current (Typ.)	<80µA/264VAC				
PROTECTION	Over Load	≥110% load, recovers automatically after fault condition is removed				
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed				
	Over Voltage (Note 4.)	Voltage	9VDC	12VDC	15VDC	24VDC
		Range	≤12VDC	≤16VDC	≤20VDC	≤30VDC
ENVIRONMENT	Working Temp.	-40°C to +85°C (Refer to "Derating curve")				
	Working Humidity	85%RH max				
	Storage Temp., Humidity	-40°C to +85°C, 10-95%RH				
	Temp. Coefficient	0.03%/ (0-50°C)				
	Vibration	10-500Hz, 2G, 10min./1cycle, 60min.each along X, Y, Z axes				
SAFETY & EMC (NOTE 3.)	Safety Standards	BS EN/EN60601-1				
	Isolation Voltage	I/P-O/P: 4000VAC				
	Isolation Resistance	I/P-O/P: >100M Ohms/500VDC 25°C 70% RH				
	EMC Emission & Immunity	EN55011, EN55032 (CISPR32) CLASS A (Refer to "Typical Application")				
	ESD	IEC/EN 61000-4-2 level 4 Contact ±8kV/Air ±15kV (Refer to "Typical Application")				
	RF	IEC/EN 61000-4-3 (Refer to "Typical Application")				
	EFT	IEC/EN 61000-4-4 level 4 4kV (Refer to "Typical Application")				
	Surge	IEC/EN 61000-4-5 level 4 2kV				
OTHERS	MTBF	300K hrs min. MIL-HDBK-217F (25°C)				
	Dimension	54.5*29.2*23.6mm (L*W*H)				
	Weight	57g/PCS				
	Package	210 PCS				
	Carton	360*300*250mm				

NOTE	1. All parameters not specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor and connected according to "typical application". Element parameters shall be the same as those measured in the suggestion form.
	3. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives.
	4. This series of overvoltage protection protects the subsequent circuit in case of module abnormality through the peripheral TVS tube.


Derating Curve

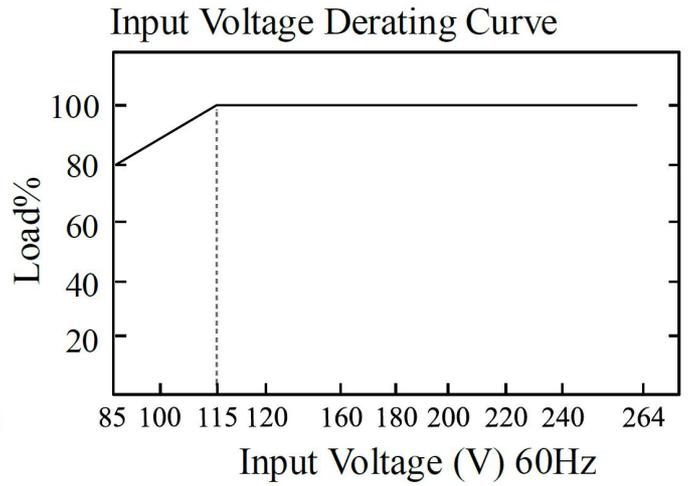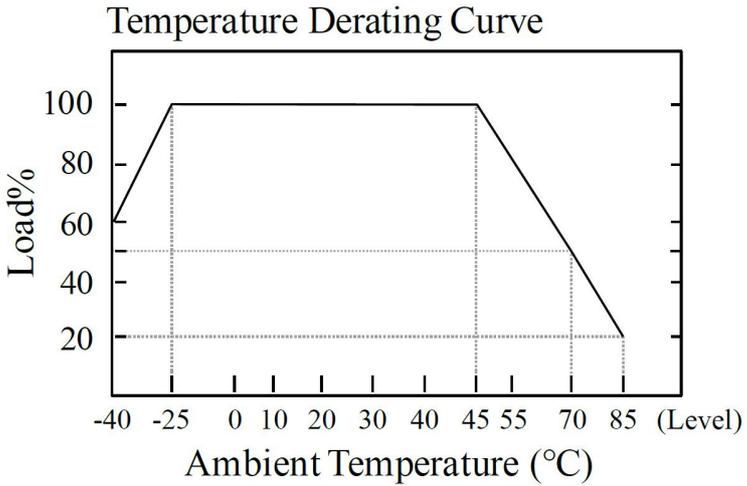

Dimensions & Function

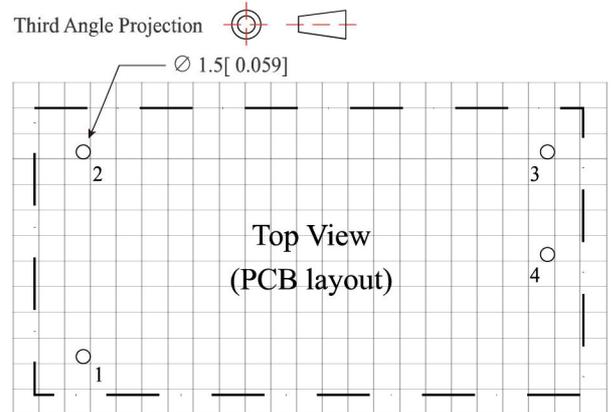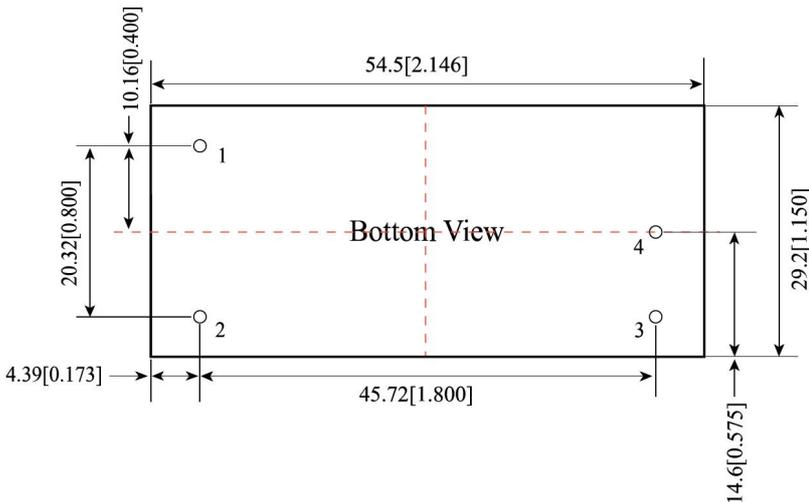


Note: Grid Spacing 2.54 * 2.54mm

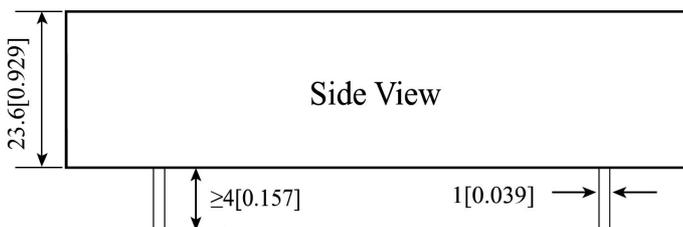

Pin	Function
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

NOTE: Unit size: mm[inch] Terminal tolerance: ± 0.1 mm Unmarked tolerances: ± 0.5 mm

Typical Application

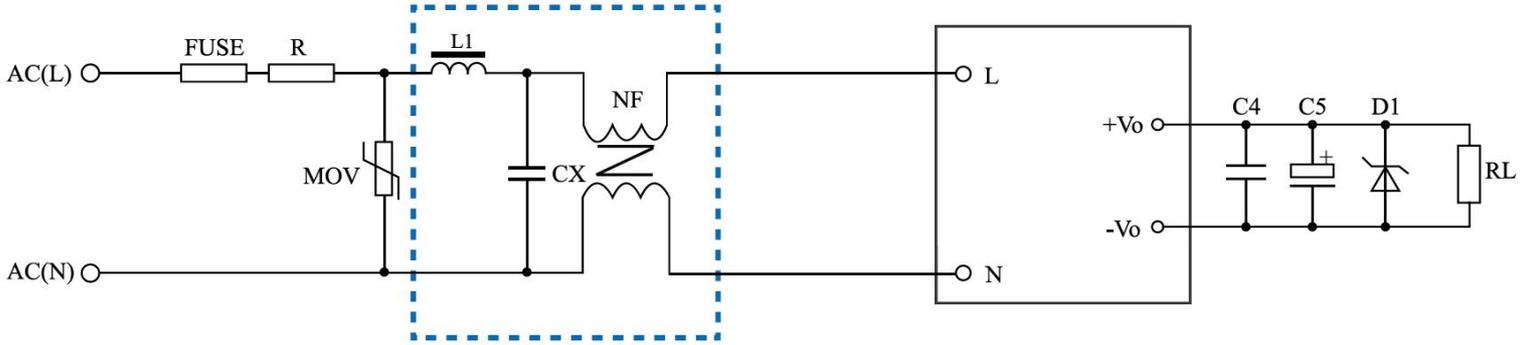

NOTE:

1. The output filtering capacitor C5 is an electrolytic capacitor. It is recommended to use a high-frequency, low resistance electrolytic capacitor. Please refer to the technical specifications provided by each manufacturer for the capacity and current flowing through it. C4 is used to remove high-frequency noise.
2. The dashed box in the figure represents the EMC filter connected to meet higher EMC requirements, which can be omitted in general applications.
3. Our company has formed a filter consisting of L1, CX, and NF within the dashed box for customer use, with the model number FA01.

List Of Components

Position Model	FUSE	R	NF	MOV	CX	L1	C4	C5	D1
QH30-20B09MU	T2A/250V	Thermistor 10D-9	Common mode inductance Inductance value 30mH Current 0.6A	14D471K	104K/275V	1mH/0.6A	104K/50V	470uF/16V	P6KE12A
QH30-20B12MU								470uF/16V	P6KE16A
QH30-20B15MU								150uF/16V	P6KE20A
QH30-20B24MU								120uF/35V	P6KE30A